

Quality Polymers



MANUFACTURED IN THE USA



25 Years of Innovation!

**RANTEC CORPORATION**

PO Box 729  
Ranchester, WY 82839

Phone: (307) 655-9565

Fax: (307) 655-9528

www.ranteccorp.com


e-mail: rantec@ranteccorp.com

# X-TACK

## HIGH PERFORMANCE TACKIFIER FOR EROSION CONTROL REVEGETATION

- Low Viscosity – Less water use, fewer loads
- High Strength – Excellent bonding and tack
- Economical – Saves material costs

*Specific Adhesive Strength*

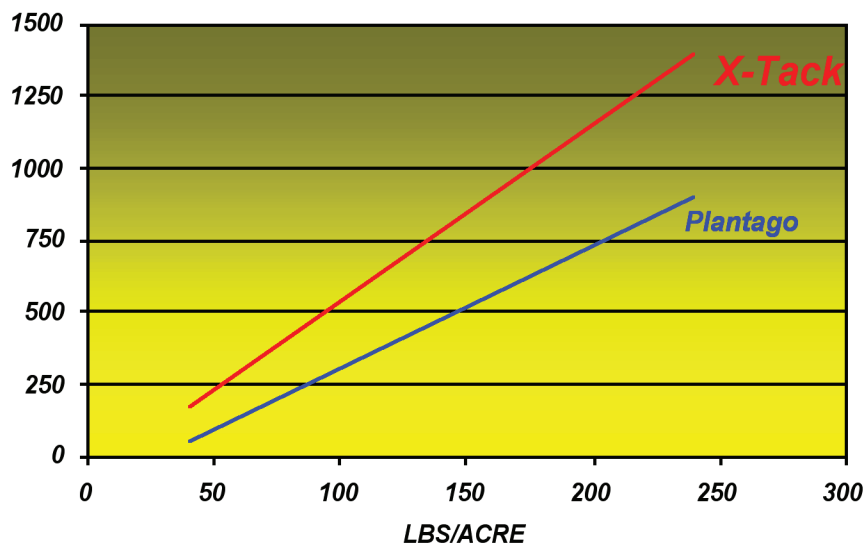

\*Specific Adhesive Strength (SAS) value is amount of force in grams required to produce tensile failure divided by the sample weight.

Quality Polymers



MANUFACTURED IN THE USA



25 Years of Innovation!

**RANTEC CORPORATION**

PO Box 729  
Ranchester, WY 82839

Phone: (307) 655-9565

Fax: (307) 655-9528

www.ranteccorp.com

e-mail: rantec@ranteccorp.com

# X-TACK

## PRODUCT DESCRIPTION

**X-Tack** is a tackifier manufactured in the USA from seed flour. **X-Tack** is 100% organic and contains a naturally evolved polymer that is an effective adhesive when applied as a slurry with fiber or paper mulch or as an overspray to bond straw fiber.

## APPLICATION GUIDELINES

The following are general guidelines only. Consult your distributor for specific site related recommendations.

## GENERAL USEAGE RATES PER ACRE

	<u>Straw Over Spray</u>	<u>Fiber Mulch</u>
Mulch, lbs/acre	200	2000
<b>X-Tack</b> , lbs/acre	100	40
Water, gals/acre	700-1500	3000-4000

## MIXING INSTRUCTIONS

Fill the tank so the lower agitator blades are covered with water. Add the required amount of **X-Tack** while operating the agitator at high speed. Add water while adding mulch, fertilizer and seed.

## PACKAGING

- **X-Tack** is packaged in 50 lb paper bags, 40 bags per pallet with stretch-wrapped cover and pallet liner.